

Hydro-Mobile **M2** Series


Hydro-Mobile **M2** Series

ACCESSORIES

World's Best seller!

Wide capacity platform mainly used for masonry work. The design minimizes the number of parts needed while maximizing the options available to you.

8.3 m (24') Motorized unit

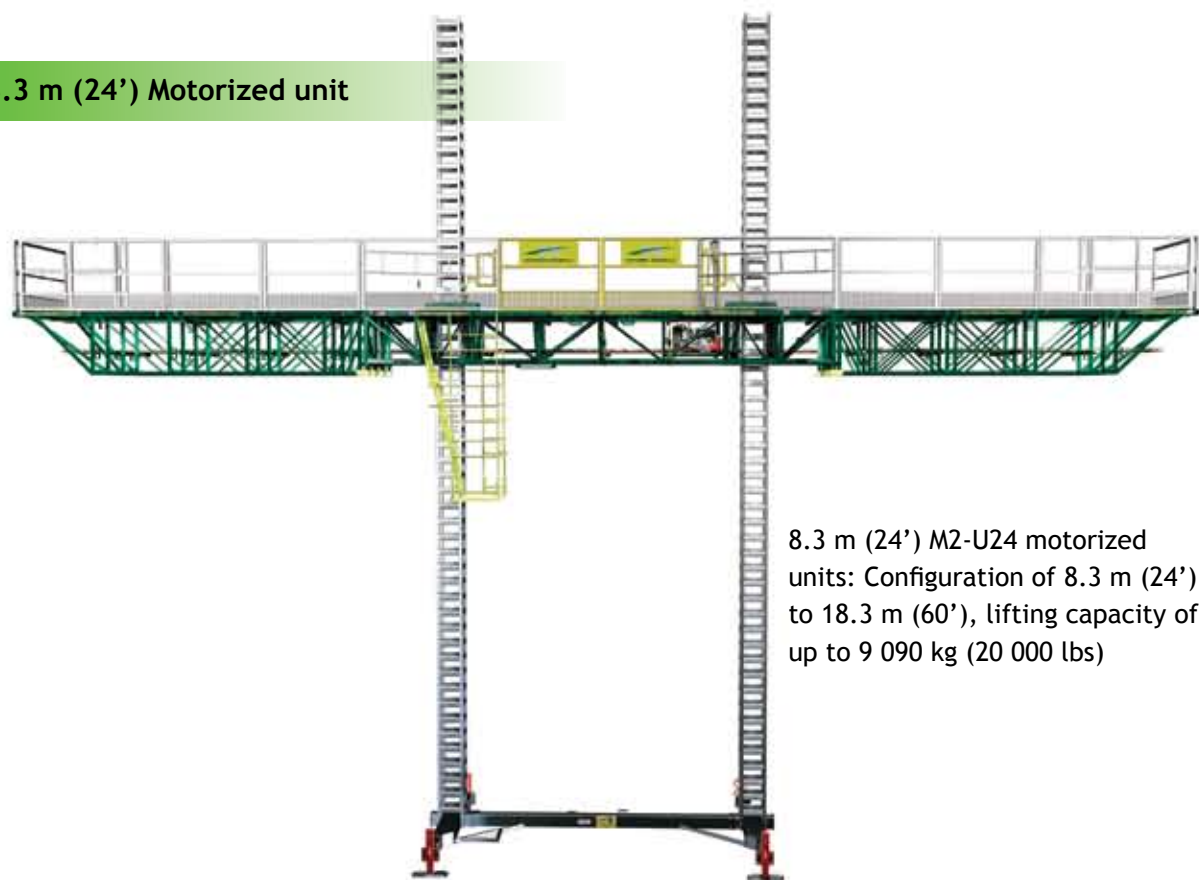

8.3 m (24') M2-U24 motorized units: Configuration of 8.3 m (24') to 18.3 m (60'), lifting capacity of up to 9 090 kg (20 000 lbs)

M Series: Features & Benefits

- Lifting capacity of up to 9 090 kg (20 000 lbs)
- Twin mast design guarantees greater stability
- Systems allows for non linear installations (angled applications possible)
- Quick installation
- Straightforward, low maintenance lift mechanism
- Storage areas for tools and accessories integrated into the mainframes reduces need to manipulate several items at once

MODULAR BRIDGES
Width 2.3 m (7')



M2-BG02X
0.76 m (30")



M2-BG06B
1.8 m (6')



M2-BG10B
3 m (10')



M2-BG10
3 m (10')



M2-BG14B
4.3 m (14')



M2-BG18B
5.5 m (18')




M2-BG20
6.1 m (20')

Twin motorized units:
Configuration of 14.6 m (48') to 42 m (138'), lifting capacity of up to 18 180 kg (40 000 lbs)

Specifications	M	F	P	E
Max. lifting capacity	9 090 kg (20 000 lbs)	5 450 kg (12 000 lbs)	2 730 kg (6 000 lbs)	2 600 kg (5 800 lbs)
Lift speed	1 m/min (3'/min)	11.5 m/min (38'/min)	3 m/min (10'/min)	6.4 m/min (21'/min)
Motor power source	Fuel	Fuel, electricity	Fuel, electricity, propane	Electricity
Single unit Min. length Max. length	7.3 m (24') 18.3 m (60')	3 m (10') 15.2 m (50')	1 m (3') 8.2 m (27')	4.3 m (14') 12 m (39')
Twin unit Max. length	42 m (138')	35 m (115')	25 m (83')	30 m (98')
Floor deck Min. width	2.1 m (7')	1.53 m (5')	1.53 m (5')	1.53 m (5')

Non linear system makes various configurations possible

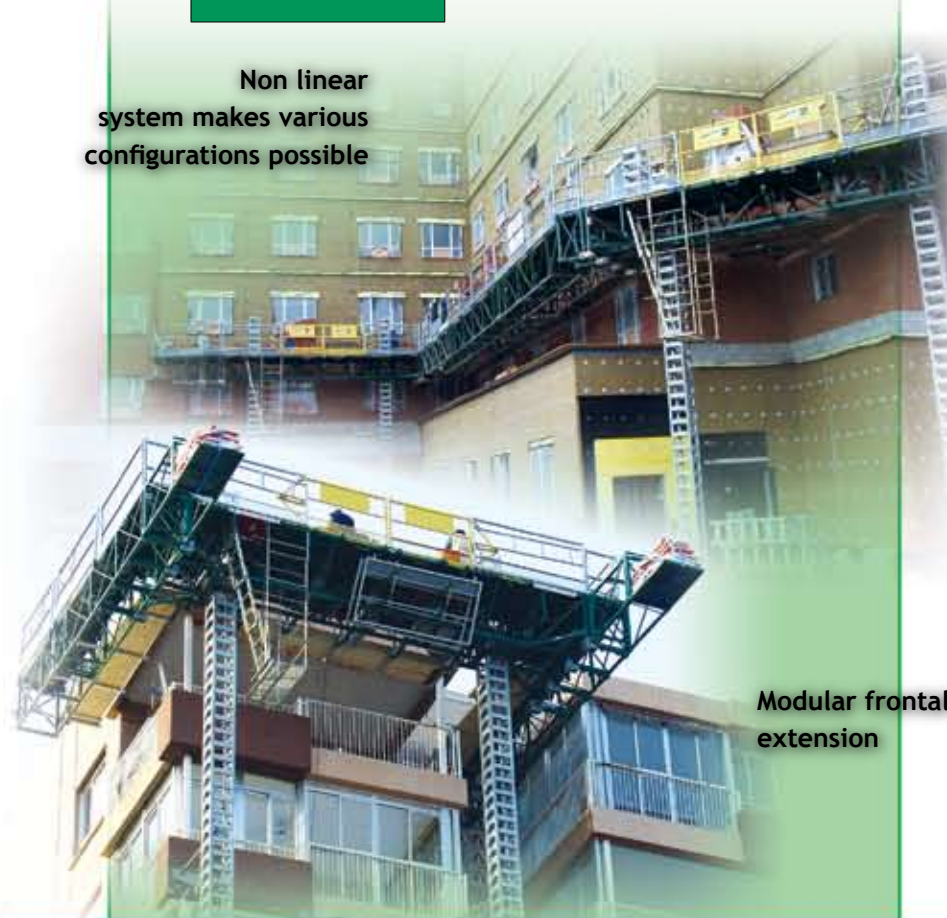

Modular frontal extension

Hoists



Capacity of 1 800 kg (4 000 lbs), 19.8 m/min (65'/min)

Weatherproofing



4.3 m (14') Motorized unit



Wheels

