

Hydro-Mobile **F** Series


Hydro-Mobile **F** Series

Best lift speed-capacity ratio! Multipurpose!

Ultra versatile platform capable of accommodating any type of job. The modular design allows for an unlimited array of configurations and delivers the top lift speed-capacity ratio in its class.



Twin motorized units: Configuration of 6 m (20') to 35 m (115'), lifting capacity of up to 7 320 kg (24 000 lbs)

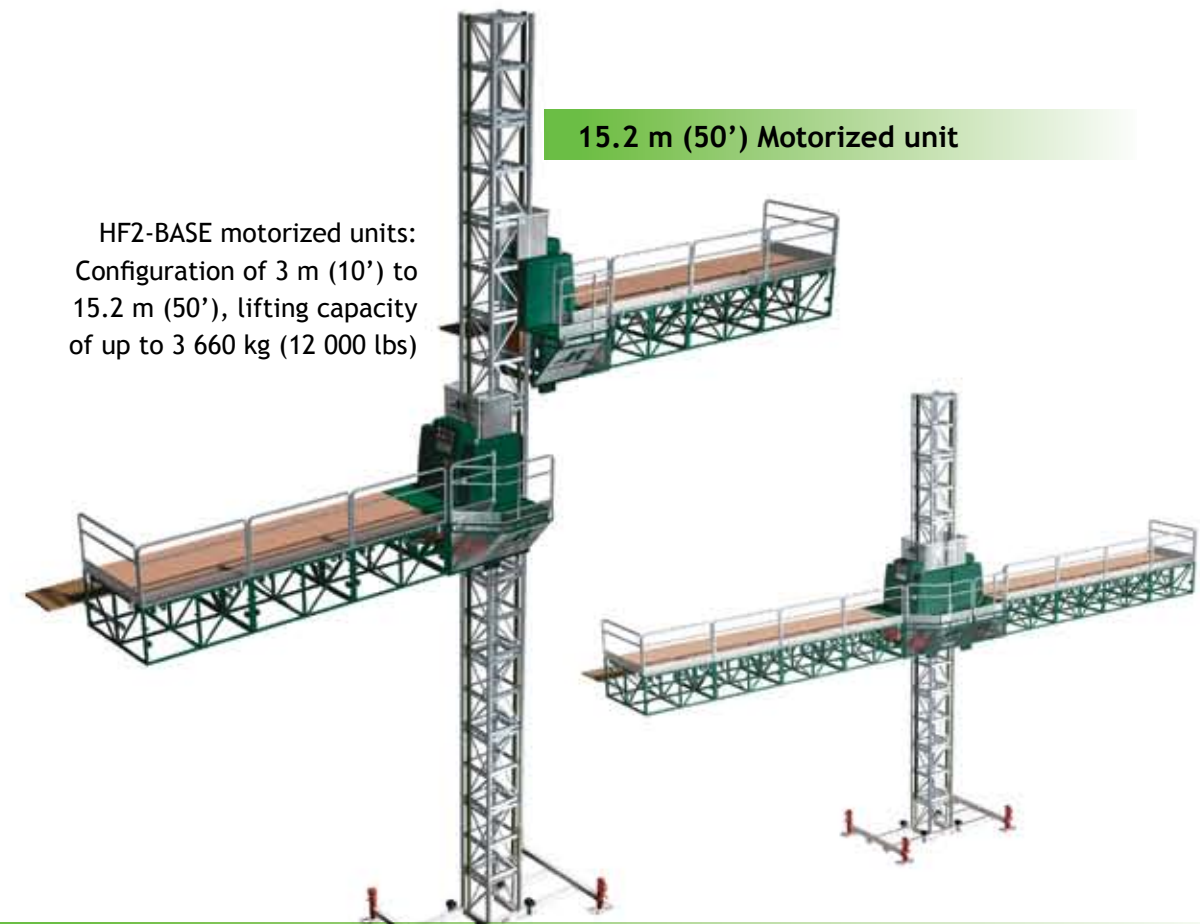

15.2 m (50') Motorized unit

HF2-BASE motorized units: Configuration of 3 m (10') to 15.2 m (50'), lifting capacity of up to 3 660 kg (12 000 lbs)

ACCESSORIES

MODULAR BRIDGES
Width 1.52 m (5')



Specifications	M	F	P	E
Max. lifting capacity	9 090 kg (20 000 lbs)	5 450 kg (12 000 lbs)	2 730 kg (6 000 lbs)	2 600 kg (5 800 lbs)
Lift speed	1 m/min (3'/min)	11.5 m/min (38'/min)	3 m/min (10'/min)	6.4 m/min (21'/min)
Motor power source	Fuel	Fuel, electricity	Fuel, electricity, propane	Electricity
Single unit				
Min. length	7.3 m (24')	3 m (10')	1 m (3')	4.3 m (14')
Max. length	18.3 m (60')	15.2 m (50')	8.2 m (27')	12 m (39')
Twin unit				
Max. length	42 m (138')	35 m (115')	25 m (83')	30 m (98')
Floor deck				
Min. width	2.1 m (7')	1.53 m (5')	1.53 m (5')	1.53 m (5')

Configurations that adapt to the job...



Installation with swivel bridge

Weatherproofing



Pedestrian underpass



Modular Bridges



Rolling wagon



F Series: Features & Benefits

- Extreme modularity
- Patented motorization system allows for separate levels
- Straightforward emergency descent device
- Three models available to satisfy every budget (F100, F200, F300)
- Easy to operate, featuring indicator lights on control panel

