


Base accessories and wheels

Access


Base Plates



S2A1
Base plate




S2A1SW
Swivel base plate



S2A1BEAM
Beam
base plate


Jacks

Code	Adjustments	Base plate	Colour code	
			Base	Head
S2	45.7 cm (18")	No	Orange	Orange
S2STD	53.3 cm (21")	No	Brown	Orange aluminum
S21	30 cm (12")	Yes	Orange	Orange
S212	45.7 cm (18")	Yes	Orange	

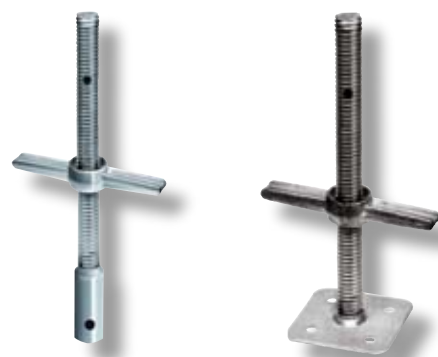

Wheels

Code	Caster wheel diameter	Load capacity
RW05	12 cm (5")	N/A
RW08S	20 cm (8")	410 kg (900 lbs)



Wood sills


WP01 et WP02




Rolling wagon

CH16 LOT
CH22LOT
Rolling wagon with pneumatic tires 40 cm (16") or 55 cm (22") in diameter


CH-AD
Rolling wagon adaptor for frame

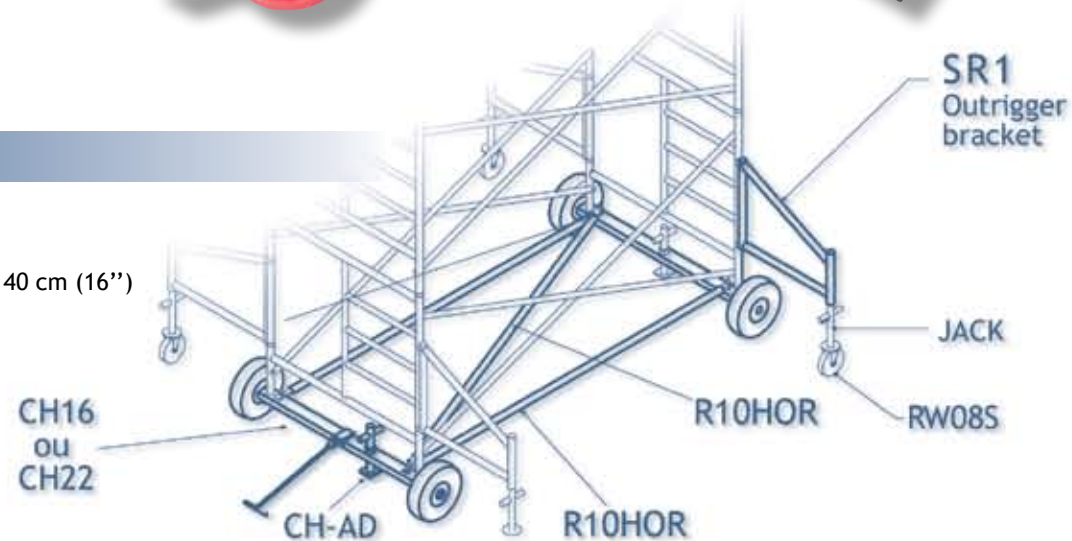


Rosette stair

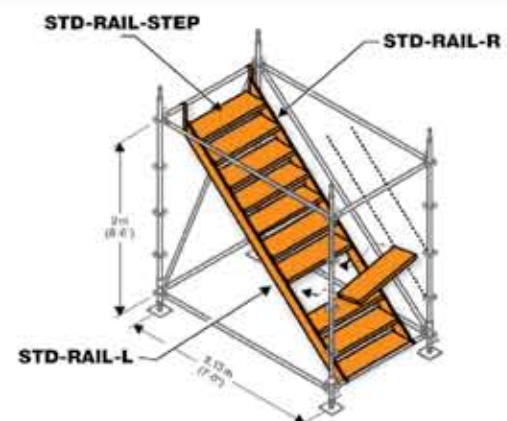

F55 and F510 stairs

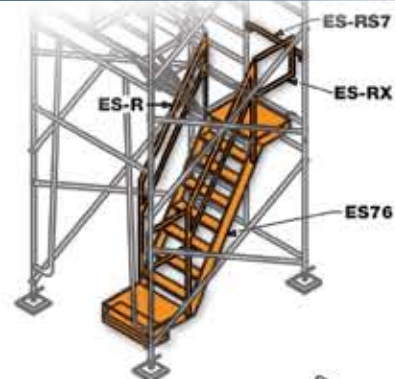


F56 stair

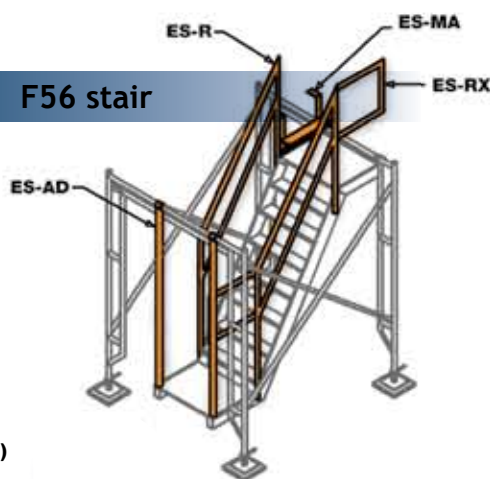

- ES76 Stair with "Diamond-grip" landings
- ES-R et ES-RX Stair guardrail (ESR) and extension (ES-RX)
- ES-RS7 Safety rail for stair
- ES-AD Stair tower adaptor for 1.90 m (6'4") arch frame (F56)
- ES-MA Adaptor step for stair tower with 1.90 m (6'4") arch frame (F56)
- ES-BARRE Starter bar

Universal ladder

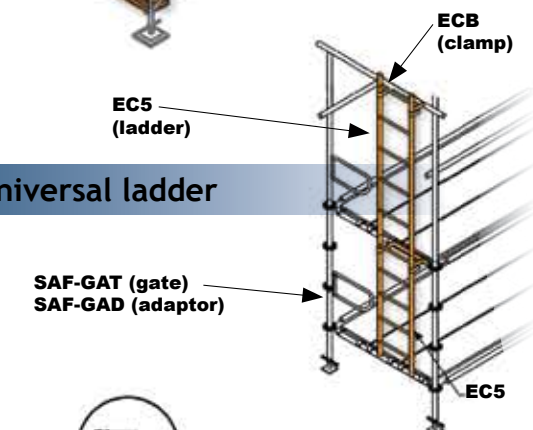

R1BETON Guardrail for concrete

Can adjust for slabs of 10.16 cm (4") to 50.8 cm (20")

Designed to accommodate wood 5.08 cm x 10.16 cm (2" x 4")

Spacing required between posts 1.8 m (6')

Ladder and deck

Deck with opening P1024A

Access ladder P1024E

